

Performance Hose Reels

P Series

P Series "Performance" spring driven hose reels have a long history of dependability and trouble free performance. Their compact space-saving size and heavy duty construction make them highly versatile and virtually indestructible. Time-tested proven components, superior design and craftsmanship have contributed to it's worldwide reputation as the most trusted hose reel.

P SERIES Offers...

- Compact Space Saving Design
- Brass BSP Swivel
- Multi Position Locking Ratchet

MODEL // P-LP350-BGX



Drive Type

Spring

Media

Air

Water

Oil

Grease


Swivel material

Brass

Seal material

Nitrile

All models with suffix BGX come with a BSP inlet & outlet

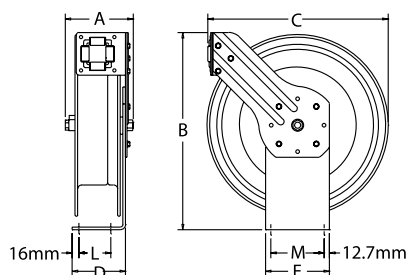

LOW PRESSURE // Air & Water

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
P-LP-125-BGX	P-LPL-125-BGX	6 mm	12 mm	8 m	21	1/4"	1/4"	12	11	1
P-LP-135-BGX	P-LPL-135-BGX	6 mm	12 mm	11 m	21	1/4"	1/4"	13	11	1
P-LP-150-BGX	P-LPL-150-BGX	6 mm	12 mm	15 m	21	1/4"	1/4"	18	16	3
P-LP-325-BGX	P-LPL-325-BGX	10 mm	17 mm	8 m	21	3/8"	3/8"	13	11	2
P-LP-335-BGX	P-LPL-335-BGX	10 mm	17 mm	11 m	21	3/8"	3/8"	17	15	3
P-LP-350-BGX	P-LPL-350-BGX	10 mm	17 mm	15 m	21	3/8"	3/8"	20	16	3
P-LP-425-BGX	P-LPL-425-BGX	12 mm	21 mm	8 m	21	1/2"	1/2"	20	18	4
P-LP-450-BGX	P-LPL-450-BGX	12 mm	21 mm	15 m	21	1/2"	1/2"	23	22	4

Reels with hose can be used for air, water with a maximum temp. 65°C reels without hose can be used for air, water & oil

MEDIUM PRESSURE // Air, Water & Oil

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
P-MP-335-BGX	P-MPL-335-BGX	10 mm	16 mm	11 m	210	3/8"	3/8"	24	20	4
P-MP-430-BGX	P-MPL-430-BGX	12 mm	19 mm	9 m	175	1/2"	1/2"	23	20	4

Reels with hose come with one wire braid hose suitable for air, water & oil with a maximum temp. 99°C

HIGH PRESSURE // Air, Water, Oil & Grease

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
P-HP-135-BGX	P-HPL-135-BGX	6 mm	13.5 mm	11 m	350	1/4"	1/4"	23	20	4
P-HP-330-BGX	P-HPL-330-BGX	10 mm	17 mm	9 m	280	3/8"	3/8"	23	20	4

Maximum temp. 99°C

DIMENSIONS (in mm)

SIZE	A	B	C	D	E	L	M
1	152	368	349	127	152	76	127
2	159	368	349	127	152	76	127
3	156	464	438	152	152	102	127
4	179	464	438	152	152	102	127