

Heavy Duty Hose Reels

SH, MP & HP Series

SH Series Super Hub™ spring driven hose reels, like the P Series, have a history of dependable performance. The larger chassis and frame accommodate longer lengths and larger diameters of hose. The dual axle support system increases the stability during operation, reduces vibration and strengthens the structural integrity of the reel.

SH, MP & HP SERIES Offers...

- Dual Axle Support Points To The Centre Shaft With Super Hub™ Axle Support System
- Solid Brass BSP Swivel
- Heavy Gauge 1/4" Steel Base



MODEL//SH-N-375-BGX

Dual axle support with Super Hub™ for added strength



MOTOR

MANUAL

SPRING

Drive Type

Spring

Media

Air

Water

Oil

Grease

Swivel material

Brass

Seal material

Nitrile

All models with suffix BGX come with a BSP inlet & outlet




Also available in
EZ-COIL
Please prefix the desired reel with "EZ-"

* Models are not available in EZ-Coil

Also available in
STAINLESS STEEL
Please see page 25

DIMENSIONS (in mm)

SIZE	A	B	C	D	E	L	M
1	222	533	498	152	152	102	127
2	235	533	498	152	152	102	127
3	248	533	498	152	152	102	127
4	286	533	498	152	152	102	127
5	222	641	584	152	152	102	127
6	235	641	584	152	152	102	127
7	248	641	584	152	152	102	127

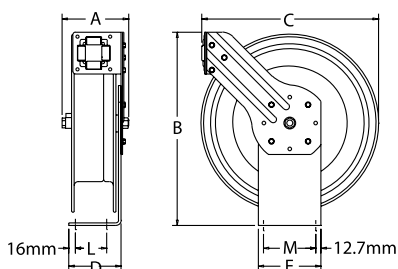

LOW PRESSURE // Air & Water

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
SH-N-160-BGX	SHL-N-160-BGX	6 mm	12 mm	18 m	21	1/4"	1/4"	23	20	1
SH-N-350-BGX	SHL-N-350-BGX	10 mm	17 mm	15 m	21	3/8"	3/8"	23	20	1
SH-N-360-BGX	SHL-N-360-BGX	10 mm	17 mm	18 m	21	3/8"	3/8"	24	21	1
SH-N-375-BGX	SHL-N-375-BGX	10 mm	17 mm	23 m	21	3/8"	3/8"	31	29	5
SH-N-3100-BGX	SHL-N-3100-BGX	10 mm	17 mm	30 m	21	3/8"	3/8"	32	27	5
SH-N-435-BGX	SHL-N-435-BGX	12 mm	21 mm	11 m	21	1/2"	1/2"	22	20	2
SH-N-450-BGX	SHL-N-450-BGX	12 mm	21 mm	15 m	21	1/2"	1/2"	25	21	2
SH-N-475-BGX	SHL-N-475-BGX	12 mm	21 mm	23 m	21	1/2"	1/2"	31	26	6
SH-N-4100-BGX	SHL-N-4100-BGX	12 mm	21 mm	30 m	21	1/2"	1/2"	37	30	6
SH-N-525-BGX	SHL-N-525-BGX	19 mm	29 mm	8 m	21	3/4"	3/4"	24	20	3
SH-N-535-BGX	SHL-N-535-BGX	19 mm	29 mm	11 m	21	3/4"	3/4"	26	21	3
SH-N-550-BGX	SHL-N-550-BGX	19 mm	29 mm	15 m	21	3/4"	3/4"	31	25	7

Maximum temp. 65°C Reels without hose can be used for air, water & oil

MEDIUM PRESSURE // Air, Water & Oil

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
MPD-N-330***	MPDL-N-330*	10 mm	17 mm	9 m	210	3/8"	3/8"	35	28	4
MP-N-340-BGX	MPL-N-340-BGX	10 mm	17 mm	12 m	210	3/8"	3/8"	29	24	1
MP-N-350-BGX	MPL-N-350-BGX	10 mm	17 mm	15 m	210	3/8"	3/8"	30	24	1
MPD-N-430***	MPDL-N-430*	12 mm	21 mm	9 m	175	1/2"	1/2"	36	28	4
MP-N-435-BGX	MPL-N-435-BGX	12 mm	21 mm	11 m	175	1/2"	1/2"	28	23	2
MP-N-450-BGX	MPL-N-450-BGX	12 mm	21 mm	15 m	175	1/2"	1/2"	30	24	2
MP-N-525-BGX	MPL-N-525-BGX	19 mm	29 mm	8 m	88	3/4"	3/4"	28	23	2
MP-N-535-BGX	MPL-N-535-BGX	19 mm	29 mm	11 m	88	3/4"	3/4"	31	25	3

Reels with hose come with one wire braid hose suitable for air, water & oil with a maximum temp. 99°C

HIGH PRESSURE // Air, Water, Oil & Grease

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
HP-N-160-BGX	HPL-N-160-BGX	6 mm	12 mm	18 m	350	1/4"	1/4"	32	25	2
HP-N-340-BGX	HPL-N-340-BGX	10 mm	17 mm	12 m	280	3/8"	3/8"	29	25	2
HP-N-350-BGX	HPL-N-350-BGX	10 mm	17 mm	15 m	280	3/8"	3/8"	30	24	2

Maximum temp. 99°C