

Side Mounted Hose Reels

SG Series

SG Series expands the capabilities of the "Side Mount" spring driven hose reels, adding a multi-position guide arm for maximum and convenient hose control.

Ideal for tight spaces, the versatile SG Series features a simple two bolt mounting pattern for easy installation and detachment on any vertical flat surface including tool benches, service vehicles, tool boxes vehicle lifting systems, walls, beams, machine tools and more. The outfitted guide arm and roller assembly are easily moved to one of the six different positions with a standard 1/2" spanner.

SG SERIES Offers...

- 2-Bolt Mounting Pattern Easily Mounts & Detaches For Multiple Work Station Applications
- Heavy Gauge Steel Arm Mounts Flat To Any Surface Such As Tool Boxes, Benches, Vehicle Lifts, Beams, etc.
- Adjustable 6 position guide arm & roller assembly provide maximum hose control.
- Sold one piece, heavy gauge 1/4" steel arm base for maximum stability.
- Multi-position Locking Ratchet Secures Hose At Desired Length. Non-locking, Less Ratchet Option Available (Add Suffix -BXC)

MODEL// SG17-L350-BGX



MOTOR

MANUAL

SPRING

Drive Type

Spring

Media

Air

Water

Oil

Grease

Swivel material

Brass

Seal material

Nitrile



Also available in
EZ-COIL®
Please prefix the desired reel with "EZ-"

All models with suffix BGX come with a BSP inlet & outlet

LOW PRESSURE // Air & Water

MODELS hose	MODELS no hose	I.D. mm	O.D. mm	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
SG13-L125-BGX	SG13L-L125-BGX	6 mm	12 mm	8 m	21	1/4"	1/4"	11	10	1
SG13-L135-BGX	SG13L-L135-BGX	6 mm	12 mm	11 m	21	1/4"	1/4"	12	10	2
SG13L-325-BGX	SG13L-L325-BGX	10 mm	17 mm	8 m	21	3/8"	3/8"	12	10	2
SG17-L350-BGX	SG17L-L350-BGX	10 mm	17 mm	15 m	21	3/8"	3/8"	18	15	3
SG17-L430-BGX	SG17L-L430-BGX	12 mm	21 mm	9 m	21	1/2"	1/2"	19	17	3
SG19-L450-BGX	SG19L-L450-BGX	12 mm	21 mm	15 m	21	1/2"	1/2"	24	20	5

Maximum temp. 65°C reels without hose can be used for air, water & oil

MEDIUM PRESSURE // Air, Water & Oil


MODELS hose	MODELS no hose	I.D. mm	O.D. mm	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
SG17-M325-BGX	SG17H-M325-BGX	10 mm	17 mm	8 m	206	3/8"	3/8"	21	18	3
SG19-M350-BGX	SG19L-M250-BGX	10 mm	17 mm	15 m	206	3/8"	3/8"	29	23	3
SG17-M425-BGX	SG17L-M425-BGX	12 mm	21 mm	8 m	172	1/2"	1/2"	21	18	5
SG19-M450-BGX	SG19L-M450-BGX	12 mm	21 mm	15 m	172	1/2"	1/2"	29	23	5

Reels with hose come with one wire braid hose suitable for air, water & oil with a maximum temp. 99°C

HIGH PRESSURE // Air, Water, Oil & Grease

MODELS hose	MODELS no hose	I.D. mm	O.D. mm	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
SG17-H125-BGX	SG17L-H125-BGX	6 mm	12 mm	8 m	345	1/4"	1/4"	20	18	4
SG19-H150-BGX	SG19L-H150-BGX	6 mm	12 mm	15 m	345	1/4"	1/4"	28	23	4
SG17-H325-BGX	SG17L-H325-BGX	10 mm	17 mm	8 m	276	3/8"	3/8"	20	18	6
SG19-H350-BGX	SG19L-H350-BGX	10 mm	17 mm	15 m	276	3/8"	3/8"	28	23	6

Maximum temp. 99°C

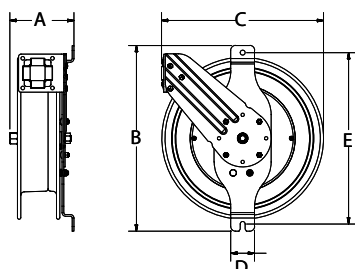

DIMENSIONS (in mm)

SIZE	A	B	C	D	E	L	M
1	222	538	498	203	229	178	203
2	235	538	498	203	229	178	203
3	235	648	584	203	229	178	203
4	248	538	498	203	229	178	203
5	248	648	584	203	229	178	203
6	254	648	584	203	229	178	203