

Dual Product Hose Reels

DP Series

DP Series “Dual Product Delivery” spring driven hose reels have two swivel inlets and two outlets for dual hose applications.

Like the SP Series they are built to handle large hose diameters used in applications demanding large volume delivery in low and medium pressures. The sturdy box-style frame has heavy duty steel cross supports to all four corners for extra strength and rigidity.

DP SERIES Offers...

- Two Inlets & Two Outlets To Handle Dual Hose Applications
- Reinforced Steel Frame Provides Maximum Strength & Stability
- Long Lasting Self-Lubricated Flange Bearings
- Cast Iron Lock Ring With Non-Sparking Bronze Pawl
- Non-Corrosive Stainless Steel Pawl Spring
- Heavy Duty 1" O.D. Stainless Steel Pinch-Proof Rollers
- Adjusts To Wall, Floor & Overhead Positions



MODEL// DLPL-475-BGX

MOTOR

MANUAL

SPRING

Drive Type

Spring

Media

Air

Water

Oil

Grease

Swivel material

Brass

Seal material

Nitrile

LOW PRESSURE // Air & Water



MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG no hose	Size
DLPL-350	10 mm	17 mm	15 m	21	3/8"	3/8"	43	1
DLPL-3100	10 mm	17 mm	30 m	21	3/8"	3/8"	53	2
DLPL-450	12 mm	21 mm	15 m	21	1/2"	1/2"	44	1
DLPL-4100	12 mm	21 mm	30 m	21	1/2"	1/2"	63	3
DLPL-525	19 mm	29 mm	8 m	21	3/4"	3/4"	42	4
DLPL-550	19 mm	29 mm	15 m	21	3/4"	3/4"	45	5

Two swivel joint inlets and two outlet risers to simultaneously handle equal lengths of two hoses.
Hoses can be different diameters, in which case the larger hose diameter determines capacity of the reel.

MEDIUM PRESSURE // Air, Water & Oil

MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG no hose	Size
DMPL-350	10 mm	17 mm	15 m	175	3/8"	3/8"	45	1
DMPL-3100	10 mm	17 mm	30 m	175	3/8"	3/8"	54	2
DMPL-450	12 mm	21 mm	15 m	140	1/2"	1/2"	46	1
DMPL-4100	12 mm	21 mm	30 m	140	1/2"	1/2"	63	3

Two swivel joint inlets and two outlet risers to simultaneously handle equal lengths of two hoses.
Hoses can be different diameters, in which case the larger hose diameter determines capacity of the reel.
Maximum temperatures 99° C. For higher temperatures and pressures consult CRI Reels

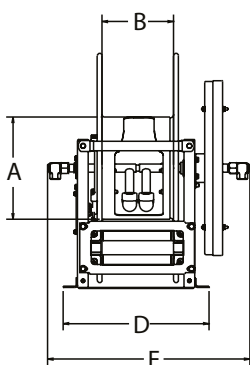

DIMENSIONS (in mm)

SIZE	A	B	C	D	E	F	G
1	267	190	508	390	559	264	521
2	267	190	610	390	264	660	622
3	267	190	711	390	264	762	728
4	267	190	508	390	603	264	521
5	267	190	610	390	603	660	622