

## Combination & Cable Reels

### C & PC Series

**C Series "Combination" spring driven air hose/electric cord reels are two reels in one compact assembly.** They are perfect for applications that require pneumatic air and an electrical power feed. The single expanded mounting base creates stability and adds to the convenience of one mounting pattern.

PC Series spring driven "Power Cable" reels are heavy duty, industrial grade power sources. They replace tangled extension cables and self-retract to increase safety, productivity and efficiency.

#### C SERIES Offers...

- Compact Two Reel Assembly
- One Convenient Mounting Base
- Each Reel Operates Independently
- Swivel Seals: NITRILE
- Suitable for 115 V and 230 V

#### PC SERIES Offers...

- Heavy Gauge Powder Coated Steel Components Cover
- Suitable for 115 V and 230 V



MODEL// C-L350-5016-X-BGX

MODEL// PC13L-5012

MODEL// PC10-3016

Drive Type

Spring

Media

Air

Water

Oil

Cable

Swivel material

Brass

Seal material


Nitrile




Also available in  
**EZ-COIL**  
Please prefix the desired reel with "EZ-"

\* Models are not available in EZ-Coil

C SERIES

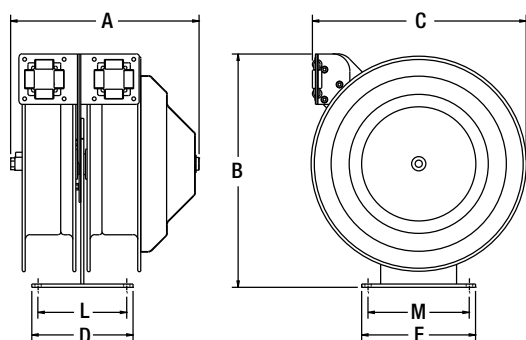

PC SERIES

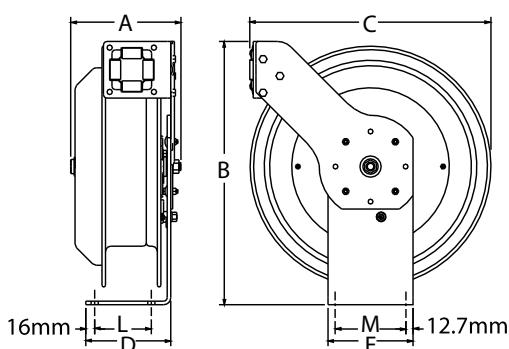

#### C SERIES // Combination Hose & Cable

| MODEL no hose/cable | Length | Hose I.D. | Hose O.D. | Cable mm <sup>2</sup> | Cable AWG | Cable Amps | KG cable/hose | KG bare | Size |
|---------------------|--------|-----------|-----------|-----------------------|-----------|------------|---------------|---------|------|
| C-L350L-5016L-X     | 15 m   | 10 mm     | 17 mm     | 1.31 mm <sup>2</sup>  | 16 GA.    | 13         | 42            | 35      | 6    |
| C-L350L-5012L-X     | 15 m   | 10 mm     | 17 mm     | 3.31 mm <sup>2</sup>  | 12 GA.    | 20         | 43            | 3       | 6    |

#### PC SERIES // Without Cable

| MODEL no cable | Cores | Length | mm <sup>2</sup>      | AWG    | Amps | KG | Size |
|----------------|-------|--------|----------------------|--------|------|----|------|
| PC13L-5016     | 3     | 15 m   | 1.31 mm <sup>2</sup> | 16 GA. | 25   | 14 | 1    |
| PC19L-7516     | 3     | 23 m   | 1.31 mm <sup>2</sup> | 16 GA. | 13   | 24 | 3    |
| PC24L-0016     | 3     | 30 m   | 1.31 mm <sup>2</sup> | 16 GA. | 13   | 28 | 4    |
| PC13L-5012     | 3     | 15 m   | 3.31 mm <sup>2</sup> | 12 GA. | 25   | 13 | 1    |
| PC19L-7512     | 3     | 23 m   | 3.31 mm <sup>2</sup> | 12 GA. | 25   | 24 | 3    |
| PC24L-0012     | 3     | 30 m   | 3.31 mm <sup>2</sup> | 12 GA. | 25   | 29 | 4    |
| PC17L-3510     | 3     | 11 m   | 5.26 mm <sup>2</sup> | 10 GA. | 35   | 28 | 2    |
| PC17L-5010     | 3     | 15 m   | 5.26 mm <sup>2</sup> | 10 GA. | 35   | 22 | 2    |
| PC10L-3016     | 3     | 9 m    | 1.5 mm <sup>2</sup>  | 16 GA. | 13   | 5  | 5    |
| PC10L-3012     | 3     | 9 m    | 4.0 mm <sup>2</sup>  | 12 GA. | 20   | 5  | 5    |

#### PC10 SERIES // Without Cable

| MODEL no cable | Cores | Length | mm <sup>2</sup>     | AWG    | Amps | KG | Size |
|----------------|-------|--------|---------------------|--------|------|----|------|
| PC10L-3016     | 3     | 9 m    | 1.5 mm <sup>2</sup> | 16 GA. | 13   | 5  | 5    |
| PC10L-3012     | 3     | 9 m    | 4.0 mm <sup>2</sup> | 12 GA. | 20   | 5  | 5    |

#### DIMENSIONS (in mm)

| SIZE | A   | B   | C   | D   | E   | L   | M   |
|------|-----|-----|-----|-----|-----|-----|-----|
| 1    | 216 | 368 | 349 | 127 | 152 | 76  | 127 |
| 2    | 279 | 463 | 438 | 152 | 152 | 76  | 127 |
| 3    | 248 | 533 | 498 | 152 | 152 | 102 | 127 |
| 4    | 248 | 641 | 584 | 152 | 152 | 102 | 127 |
| 5    | 188 | 272 | 267 | 118 | 213 | 64  | 152 |
| 6    | 394 | 464 | 438 | 203 | 229 | 178 | 203 |

PC10 SERIES

