

Hand Crank & Motor Driven Reels

1125 Series

1125 Series hand crank and motorized hose reels have the features demanded by industry professionals. The industry preferred design features a sturdy one piece all welded "A" frame base, low profile outlet riser and open drum slot design provides a non-crimping, flat smooth hose wrap.

1125 SERIES Offers...

- One Piece All Welded Steel "A" Frame Construction
- Low Profile Riser & Open Drum Slot For Smooth, Even Hose Wraps
- Direct Gear Drive On Motor Driven Models - No Chains
- Permanently Lubricated Pillow Block Bearings For Smooth Rotation
- Long-Handled Lock Pin Secures Reel From Rotation
- Adjustable Friction Brake Assembly To Brake Or Lock The Drum
- All 1125 Series can be upgraded to have a High Pressure Swivel for 350 BAR capacity.



SHOWN WITH OPTIONAL BRACKET

Drive Type

Manual

Motor

Media

Air

Water

Oil

Swivel material

Brass

Seal material

Viton


Also available in

STAINLESS STEEL

Please see page 34

PORTABLE CARTS & CARRY HANDLES

Model	Portable Cart for
PR-1125-6	1125-4-100 & 1125-5-50
PRP-1125-6	1125-4-100
PR-1125-12	1125-4-200
PRP-1125-12	1125-4-200
Model	Carry handles for
PR-1125-HC	1125-4-100 & 1125-5-50

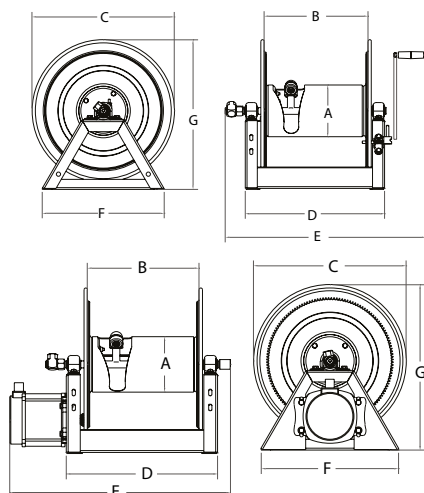

1125 HAND CRANK MODELS // Air & Water & Oil

MODEL no hose	I.D.	O.D.	Length	I.D.*	O.D.*	Length*	BAR	Inlet F NPT 90°	Outlet F NPT	KG	Size
1125-4-100	12 mm	21 mm	30 m	10 mm	17 mm	42 m	210	1/2"	1/2"	16	1
1125-4-200	12 mm	21 mm	61 m	10 mm	17 mm	91 m	210	1/2"	1/2"	18	2
1125-4-325	12 mm	21 mm	99 m	10 mm	17 mm	136 m	210	1/2"	1/2"	22	3
1125-4-450	12 mm	21 mm	137 m	10 mm	17 mm	189 m	210	1/2"	1/2"	24	4
1125-4-500	12 mm	21 mm	152 m	10 mm	17 mm	212 m	210	1/2"	1/2"	26	5
1125-5-50	19 mm	29 mm	15 m	12 mm	21 mm	30 m	210	3/4"	3/4"	17	6
1125-5-100	19 mm	29 mm	30 m	12 mm	21 mm	61 m	210	3/4"	3/4"	19	7
1125-5-175	19 mm	29 mm	53 m	12 mm	21 mm	98 m	210	3/4"	3/4"	23	8
1125-5-200	19 mm	29 mm	61 m	12 mm	21 mm	136 m	210	3/4"	3/4"	25	9
1125-5-250	19 mm	29 mm	76 m	12 mm	21 mm	152 m	210	3/4"	3/4"	27	10
1125-6-35	25 mm	37 mm	11 m	19 mm	29 mm	15 m	210	1"	1"	23	11
1125-6-50	25 mm	37 mm	15 m	19 mm	29 mm	23 m	210	1"	1"	25	12
1125-6-75	25 mm	37 mm	23 m	19 mm	29 mm	36 m	210	1"	1"	28	13
1125-6-100	25 mm	37 mm	30 m	19 mm	29 mm	45 m	210	1"	1"	31	14

* Adapter required

MOTORS DRIVEN MODELS // Add the suffix to hand crank models above

Suffix #	Motor Type	Description	Extra KG
E	ELECTRIC - 12V DC	1/3 HP	6
EF	ELECTRIC - 24V DC	1/3 HP	6
ED	ELECTRIC - 12V DC XP	1/2 HP	12
EB	ELECTRIC - 24V DC XP	1/2 HP	12
EA	ELECTRIC - 115V DC XP	1/2 HP	12
EJ	ELECTRIC - 230V XP	1/2 HP	12
A	AIR REWIND	4AM	4
AB	AIR REWIND	6AM	6
H	HYDRAULIC REWIND	END PORTED 9/16-18 UNF	3
C	CRANK	BEVEL CRANK	0

DIMENSIONS (in mm)

SIZE	A	B	C	D	Crank E	Elec E	Air E	F	Crank G	Elec G	Air G
1	159	152	445	289	496	502	432	385	477	489	489
2	159	305	445	441	648	655	583	385	477	489	489
3	159	457	445	594	801	807	737	385	477	489	489
4	159	610	445	746	953	959	889	385	477	489	489
5	159	711	445	848	1055	1061	991	385	477	489	489
6	159	152	445	289	528	508	442	385	477	489	489
7	159	305	445	441	680	661	594	385	477	489	489
8	159	457	445	594	832	813	747	385	477	489	489
9	159	610	445	746	985	966	899	385	477	489	489
10	159	711	445	848	1086	1067	1001	385	477	489	489
11	159	241	445	378	661	607	566	385	470	486	486
12	159	394	445	530	813	759	718	385	470	486	486
13	159	559	445	695	978	924	870	385	470	486	486
14	159	711	445	848	1131	1077	1036	385	470	486	486